



LIQUID LINE FILTER DRIERS  
LIQUID LINE BI-FLOW FILTER DRIERS  
SUCTION LINE FILTER DRIERS  
SIGHT GLASS

# FILTER DRIERS



**THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!**



## Premium Line



The ProParts premium liquid line filter drier is a compacted bead drier that provides universal replacement and superior system protection.

### LIQUID LINE FILTER DRIERS

### CROSS REFERENCE

PP PART NO.	DESCRIPTION	DANFOSS	PARKER	SPORLAN
PPDRI083S	8 cu. in., 3/8 in. ODF conn.	DCL 083 S or DML 083 S	083S	C-083-S or CG-083-S
PPDRI084S	8 cu. in., 1/2 in. ODF conn.	DCL 084 S or DML 084 S	084S	C-084-S
PPDRI163S	16 cu. in., 3/8 in. ODF conn.	DCL 163 S or DML 163 S	163S	C-163-S or CG-163-S
PPDRI164S	16 cu. in., 1/2 in. ODF conn.	DCL 164 S or DML 164 S	164S	C-164-S or CG-164-S
PPDRI165S	16 cu. in., 5/8 in. ODF conn.	DCL 165 S or DML 165 S	165S	C-165-S or CG-165-S

- 20 micron filtration
- 99.9% filtration efficiency
- Maximum water and acid capacity
- Rapid moisture removal rates
- Maximum working pressure: 680 psig



The ProParts premium solid core, bi-directional liquid line filter drier is perfect for heat pump applications.

### LIQUID LINE BI-FLOW FILTER DRIERS

### CROSS REFERENCE

PP PART NO.	DESCRIPTION	DANFOSS	PARKER	SPORLAN
PPDRIBF083S	8 cu. in., 3/8 in. ODF conn.	DMB 083 S or DCB 083 S	BF083S	HPC-103-S
PPDRIBF163	16 cu. in., 3/8 in. SAE conn.	DMB 083 or DCB 083	BF083	HPC-103
PPDRIBF163S	16 cu. in., 3/8 in. ODF conn.	DMB 163 S or DCB 163 S	BF163S	HPC-163-S-HH
PPDRIBF164S	16 cu. in., 1/2 in. ODF conn.	DMB 164 S or DCB 164 S	BF164S	HPC-164-S-HH

- Internal check allows flow and filtration in either direction
- Eliminates need for external check valve
- High moisture and acid removal capacity
- Maximum working pressure: 680 psig



The ProParts premium suction line filter driers can be used after burnout or when major work has been performed.

### SUCTION LINE FILTER DRIERS

### CROSS REFERENCE

PP PART NO.	DESCRIPTION	DANFOSS	PARKER	SPORLAN
PPDRI85S	8 cu. in., 5/8 in. ODF conn.	DAS 085SVV	SLD8-5SVHH	
PPDRI86S	8 cu. in., 3/4 in. ODF conn.	DAS 086SVV	SLD8-6SV-HH	
PPDRI135S	13 cu. in., 5/8 in. ODF conn.		SLD13-6SV-HH	
PPDRI136S	13 cu. in., 3/4 in. ODF conn.		SLD13-6SV-HH	
PPDRI137S	13 cu. in., 7/8 in. ODF conn.		SLD13-7SV-HH	
PPDRI139S	14 cu. in., 1-1/8 in. ODF conn. Short lay-in length			C-149-S-TT-HH
PPDRI166V	16 cu. in., 3/4 in. ODF conn.	DAS 166SVV		C-166-S-T-HH
PPDRI167V	16 cu. in., 7/8 in. ODF conn.	DAS 167SVV		C-167-S-T-HH
PPDRI277V	27 cu. in., 7/8 in. ODF conn.		SLD27-7SV-HH	
PPDRI279V	27 cu. in., 1-1/8 in. ODF conn.		SLD27-9SV-HH	
PPDRI306V	30 cu. in., 3/4 in. ODF conn.	DAS 306SVV	SLD306-V	C-306-S-T-HH
PPDRI307V	30 cu. in., 7/8 in. ODF conn.	DAS 307SVV	SLD307-V	C-307-S-T-HH
PPDRI5411S	54 cu. in., 1-3/8 in. ODF conn.		SLD54-11SV-HH	C-4311-S-T-HH

- Dual access valves offer easy pressure readings
- High acid removal capacity
- Solid core construction with 40 micron filtration
- Solid copper connections
- Maximum working pressure: 500 psig



The ProParts sight glass provides an accurate method of determining the moisture content of a system's refrigerant.

### SIGHT GLASS

### CROSS REFERENCE

PP PART NO.	DESCRIPTION	DANFOSS	PARKER	SPORLAN
PPDRISG3S	3/8 in. ODF sight glass.	SGL 10S (3/8 in. ODF) or SGN 10S (3/8 in. ODF)	PSG-3S	SA-13S or SA-K143

- Detects relative humidity at 3%
- Hermetic heat resistant construction
- Wide angle viewing lens for ease of monitoring
- All brass body with solid copper connections
- Maximum working pressure: 680 psig



The ProParts Value Line filter driers provide quality system protection at an economical price for residential air conditioning.

VALUE LINE FILTER DRIERS OFFER A MAXIMUM WORKING PRESSURE OF 680 PSIG.

LIQUID LINE FILTER DRIERS

LIQUID LINE FILTER DRIERS		CROSS REFERENCE
PP PART NO.	DESCRIPTION	PARKER
PPV083S	8 cu. In., 3/8 in. ODF conn.	3SS3S
PPV083F	8 cu. In., 3/8 in. Flare conn.	LLD-083
PPV084S	8 cu. In., 1/2 in. ODF conn.	LLD-084S
PPV163S	16cu. In., 3/8 in. ODF conn.	5SS3S
PPV163F	16cu. In., 3/8 in. Flare conn.	LLD-163
PPV164S	16cu. In., 1/2 in. ODF conn.	LLD-164S
PPV165LS	16cu. In., 5/8 in. ODF conn.	LLD-165S

- **Compacted bead construction**
- **High water and acid removal**

LIQUID LINE BI-FLOW FILTER DRIERS

LIQUID LINE BI-FLOW FILTER DRIERS		CROSS REFERENCE
PP PART NO.	DESCRIPTION	PARKER
PPV083SBF	8 cu. in., 3/8 in. ODF conn.	3SSBF3S
PPV163SBF	16 cu. in., 3/8 in. ODF conn.	5SSBF3S
PPV163BF	16 cu. in., 3/8 in. Flare conn.	BF-163
PPV164SBF	16 cu. in., 1/2 in. ODF conn.	BF-164S
PPV165SBF	16 cu. in., 5/8 in. ODF conn.	BF-165S
PPV166SBF	16 cu. in., 3/4 in. ODF conn.	
PPV167SBF	16 cu. in., 7/8 in. ODF conn.	


- **Internal check allows flow and filtration in either direction**
- **Eliminates need for external check valve**

SUCTION LINE FILTER DRIERS

SUCTION LINE FILTER DRIERS		CROSS REFERENCE
PP PART NO.	DESCRIPTION	PARKER
PPV165S	16 cu. in., 5/8 in. ODF conn.	SLD165-V
PPV166S	16 cu. in., 3/4 in. ODF conn.	SLD166-V
PPV167S	16 cu. in., 7/8 in. ODF conn.	SLD167-V
PPVDRI279V	27 cu. in., 1-1/8 in. ODF conn.	SLD27-9SV-HH

- **Dual access valves offer easy pressure readings**
- **Solid core construction**
- **Solid copper connections**

**ProParts compacted bead liquid line filter drier is superior from the inside out.**

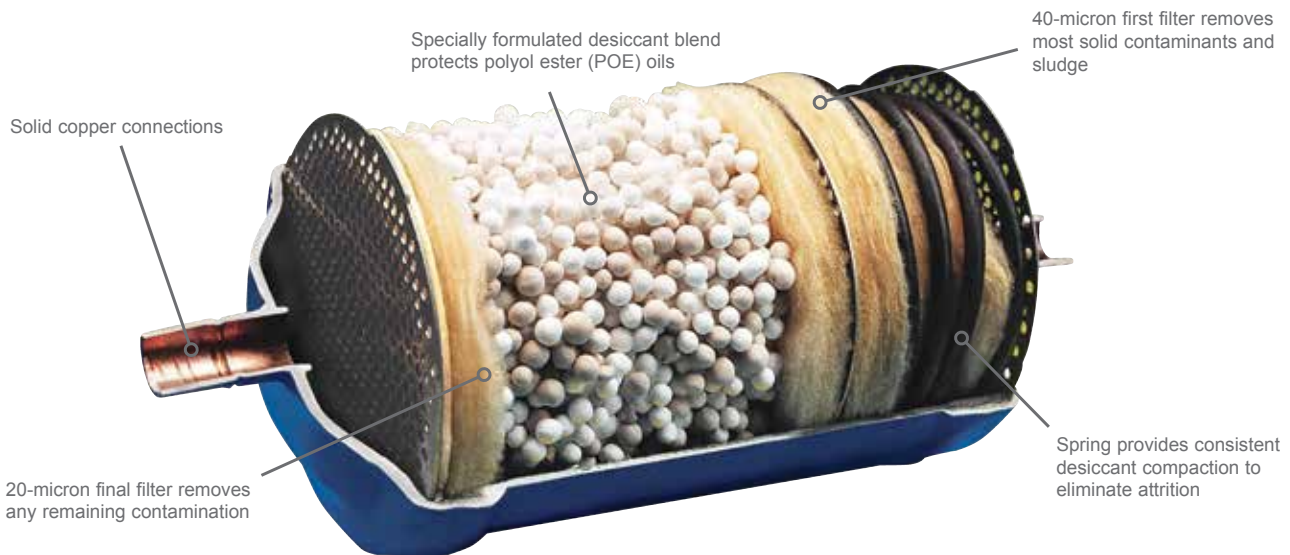



# PRO TO GO!

**THE BRANDS YOU TRUST FROM THE BRAND YOU RELY ON!**



Where applicable, our products are listed or recognized by the Canadian Standards Association and Underwriter's Laboratories. The products featured in this literature are not designed, engineered or assembled by PROPARTS or any of its affiliated organizations. To verify the information provided, please contact the original manufacturer. For additional information, please contact your local PROPARTS representative. Our continuing commitment to quality products may mean a change in specifications without notice.